

CAM-6600 Series



- 1/4" EXviewHAD / Progressive CCD
- Day and night function with Mechanical IR Cut Filter
- Optical Zoom Ratio 18X (CAM-6610) / 23X (CAM-6620) / 35X (CAM-6630)
- 0.005 Lux (CAM-6610) / 0.02 Lux (CAM-6620) / 0.05 Lux (CAM-6630) at F1.4
- Backlight Compensation, Auto Iris Control, Auto White Balance supported
- MPEG-4 ASP compression
- CIF up to Full D1 resolution at 30/25 FPS
- Multi-stream with variable frame rate in the same compression
- Hardware motion detection, Digital Input/Output
- Fail-over network protection and QoS enabled (L3) video streaming
- IP66 weatherproof supported
- Surface, flush and wall mount supported

Outdoor wall mount




▶ Appearance



Outdoor pole mount




▶ Appearance

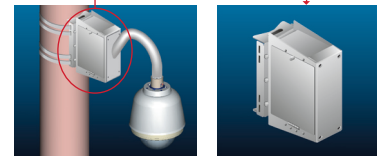


Outdoor corner mount




▶ Appearance

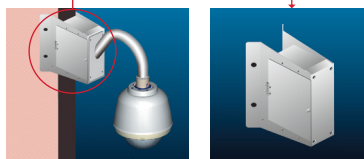

Outdoor surface mount

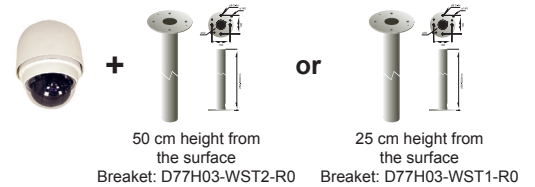

▶ Appearance

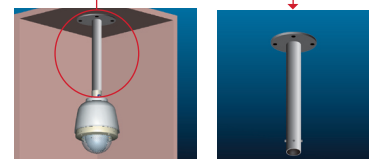

* For more information, please refer to Technical FAQ, TS-00004 on ACTI Website.

CAM-6600 Series

PRODUCT SPECIFICATION

		CAM-6610	CAM-6620	CAM-6630
Image	Device	EXviewHAD CCD	Progressive CCD	Progressive CCD
	Size	1/4 inch		
	Effective Pixels (HxV)	768x494 (NTSC); 752x582 (PAL)		
Min. Scene Illumination	Horizontal Resolution	480 TVL	520 TVL	540 TVL
	Color	0.1 Lux (F1.4, 1/4s(NTSC) or 1/3s (PAL))	0.1 Lux (F1.6, 1/60s(NTSC), 1/50s (PAL))	0.05 Lux (F1.4, 1/60s(NTSC), 1/50s (PAL))
Lens	B/W	0.005 Lux (F1.4, 1/1s (NTSC) or 1/1s (PAL), IR ON)	0.02 Lux or less (F1.4, 1/4s (NTSC) or 1/3s (PAL), IR ON)	0.01 Lux (F1.4, 1/4s (NTSC) or 1/3s (PAL), IR ON)
	Focal Length	4.1 ~ 73.8 mm	3.6 ~ 82.8 mm	3.4 ~ 119 mm
	Zoom Ratio	18x	23x	35x
	Aperture Ratio	F1.4 (Wide), F3.0 (Tele)	F1.6 (Wide), F3.7 (Tele)	F1.4 (Wide), F4.2 (Tele)
	Diagonal Angle	48° (W) ~ 2.8° (T)	54° (W) ~ 2.5° (T)	55.8° (W) ~ 1.7° (T)
	Zoom Speed	2.1 sec (1x to 18x)	2.9 sec (1x to 23x)	4.6 sec (1x to 35x)
	Digital Zoom		X1 ~ X12 variable	
Synchronization	Sync. System	Internal / Line Lock		
Day/Night Functions	Mechanical IR Cut Filter	Yes		
	Motion Detection	Yes (3 windows)		
Functions	Electronic Shutter	1/1 ~ 1/10,000 sec. (NTSC) 1/1 ~ 1/10,000 sec. (PAL)	1/2 ~ 1/30,000 sec. (NTSC) 1/1.5 ~ 1/30,000 sec. (PAL)	
	Image Stabilizer	N/A	N/A	Yes
	Fixed Shutter	Yes		
	Auto Slow Shutter	Yes		
	BLC	On / Off		
	AGC	Auto / Manual		
	Auto Exposure Control	Auto / Manual / Exposure Compensation	Auto / Manual / IRIS OFFSET	
	Exposure Compensation	-10.5 ~ +10.5 dB	IRIS OFFSET (000 ~ 100 steps)	
	White Balance	Auto / Manual		
	Camera ID	Max. 20 characters		
	Number of Preset	256 points		
	Auto Iris Control	Auto / Manual		
	Sequence Group	8		
	Auto Pan (Patrol)	4		
	Schedule	Yes		
	Privacy Mask	24	8	
	Cruise	1		
	Absolute Position	Yes	Yes*	
	Wide Dynamic Range	N/A	Yes	
	S/N Ratio	S/N Ratio		
PAN/TILT	Manual Speed		Pan Tilt	
	Preset Speed		Pan Tilt	
	Preset Accuracy		Pan Tilt	
	Travel Range		Pan Tilt	
			Pan	
			Tilt	
Video (Compression)	Compression	MPEG-4 ASP compliant		
	Picture Resolution	Full D1 (720 x 480 in NTSC, 720 x 576 in PAL); CIF (352 x 240 in NTSC, 352 x 288 in PAL); QCIF (160 x 112 in NTSC, 176 x 144 in PAL)		
	Bit Rate	28K ~ 3M bps		
	Image Frame Rate	30fps at full D1 resolution (NTSC); 25fps at full D1 resolution (PAL)		
Video Output	Multi-stream	Up to 4 configurable frame rate/bit rate streams for preview and recording		
Alarm	Composite Output	CVBS, 1.0Vp-p with 75 Ω loading, BNC connector		
	Input	8, TTL, terminal block (option)		
Casing	Output	1, TTL, terminal block (option)		
	IP66 Rated	Weatherproof housing with IP66 certification		
Network	Vandal Resistant	Yes (vandal proof cover is optional)		
	LAN Port	Ethernet(10/100Base-T), RJ-45 connector		
	WAN Port	Ethernet(10/100Base-T), RJ-45 connector		
Software	Protocol	TCP, UDP, IP, HTTP, DHCP, PPPoE, RTP, RTSP, FTP, SMTP, DNS, DDNS, NTP, ICMP, IGMP, ARP		
	Web Browser	Microsoft Internet Explorer 6.0 or above		
	SDK	ACTi SDK-10000		
Operating	Security	Password Protection: configured by the administrator		
	Temperature	-45 °C ~ 50 °C (-49 °F ~ 122 °F)		
Power	Power Requirement	AC 24 V		
	Power Consumption	65 W (w/ Heater ON)		
Physical	Dimensions (ØxH)	172 mm x 302.5 mm (6.7" x 11.9"); 190 mm x 302.5 mm (7.5" x 11.9") with sunshield		
	Weight	5,800 g (12.9 lb)		

* Only Pan/Tilt absolute position is supported.